


CAPACITY OF EACH CONVEYOR "1-2"
 approx. 120 slots interaxis of 33 mm. When storing particularly bulky garments such as those which are usually present in a cloakroom, it is not always possible to place one garment in every slot, but it may be necessary to skip one every so often in order to recuperate space width ways. According to our experience, we consider that by using hanger of reduced width, such as those supplied by us, it is possible to position up to one garment every 50 mm. Assuming such a value, we are able to store up to 75-85 bulky garments. TOTAL CAPACITY CONVEYORS "1+2" approx. 240 slots interaxis of 33 mm., 150-170/p (50 mm.)

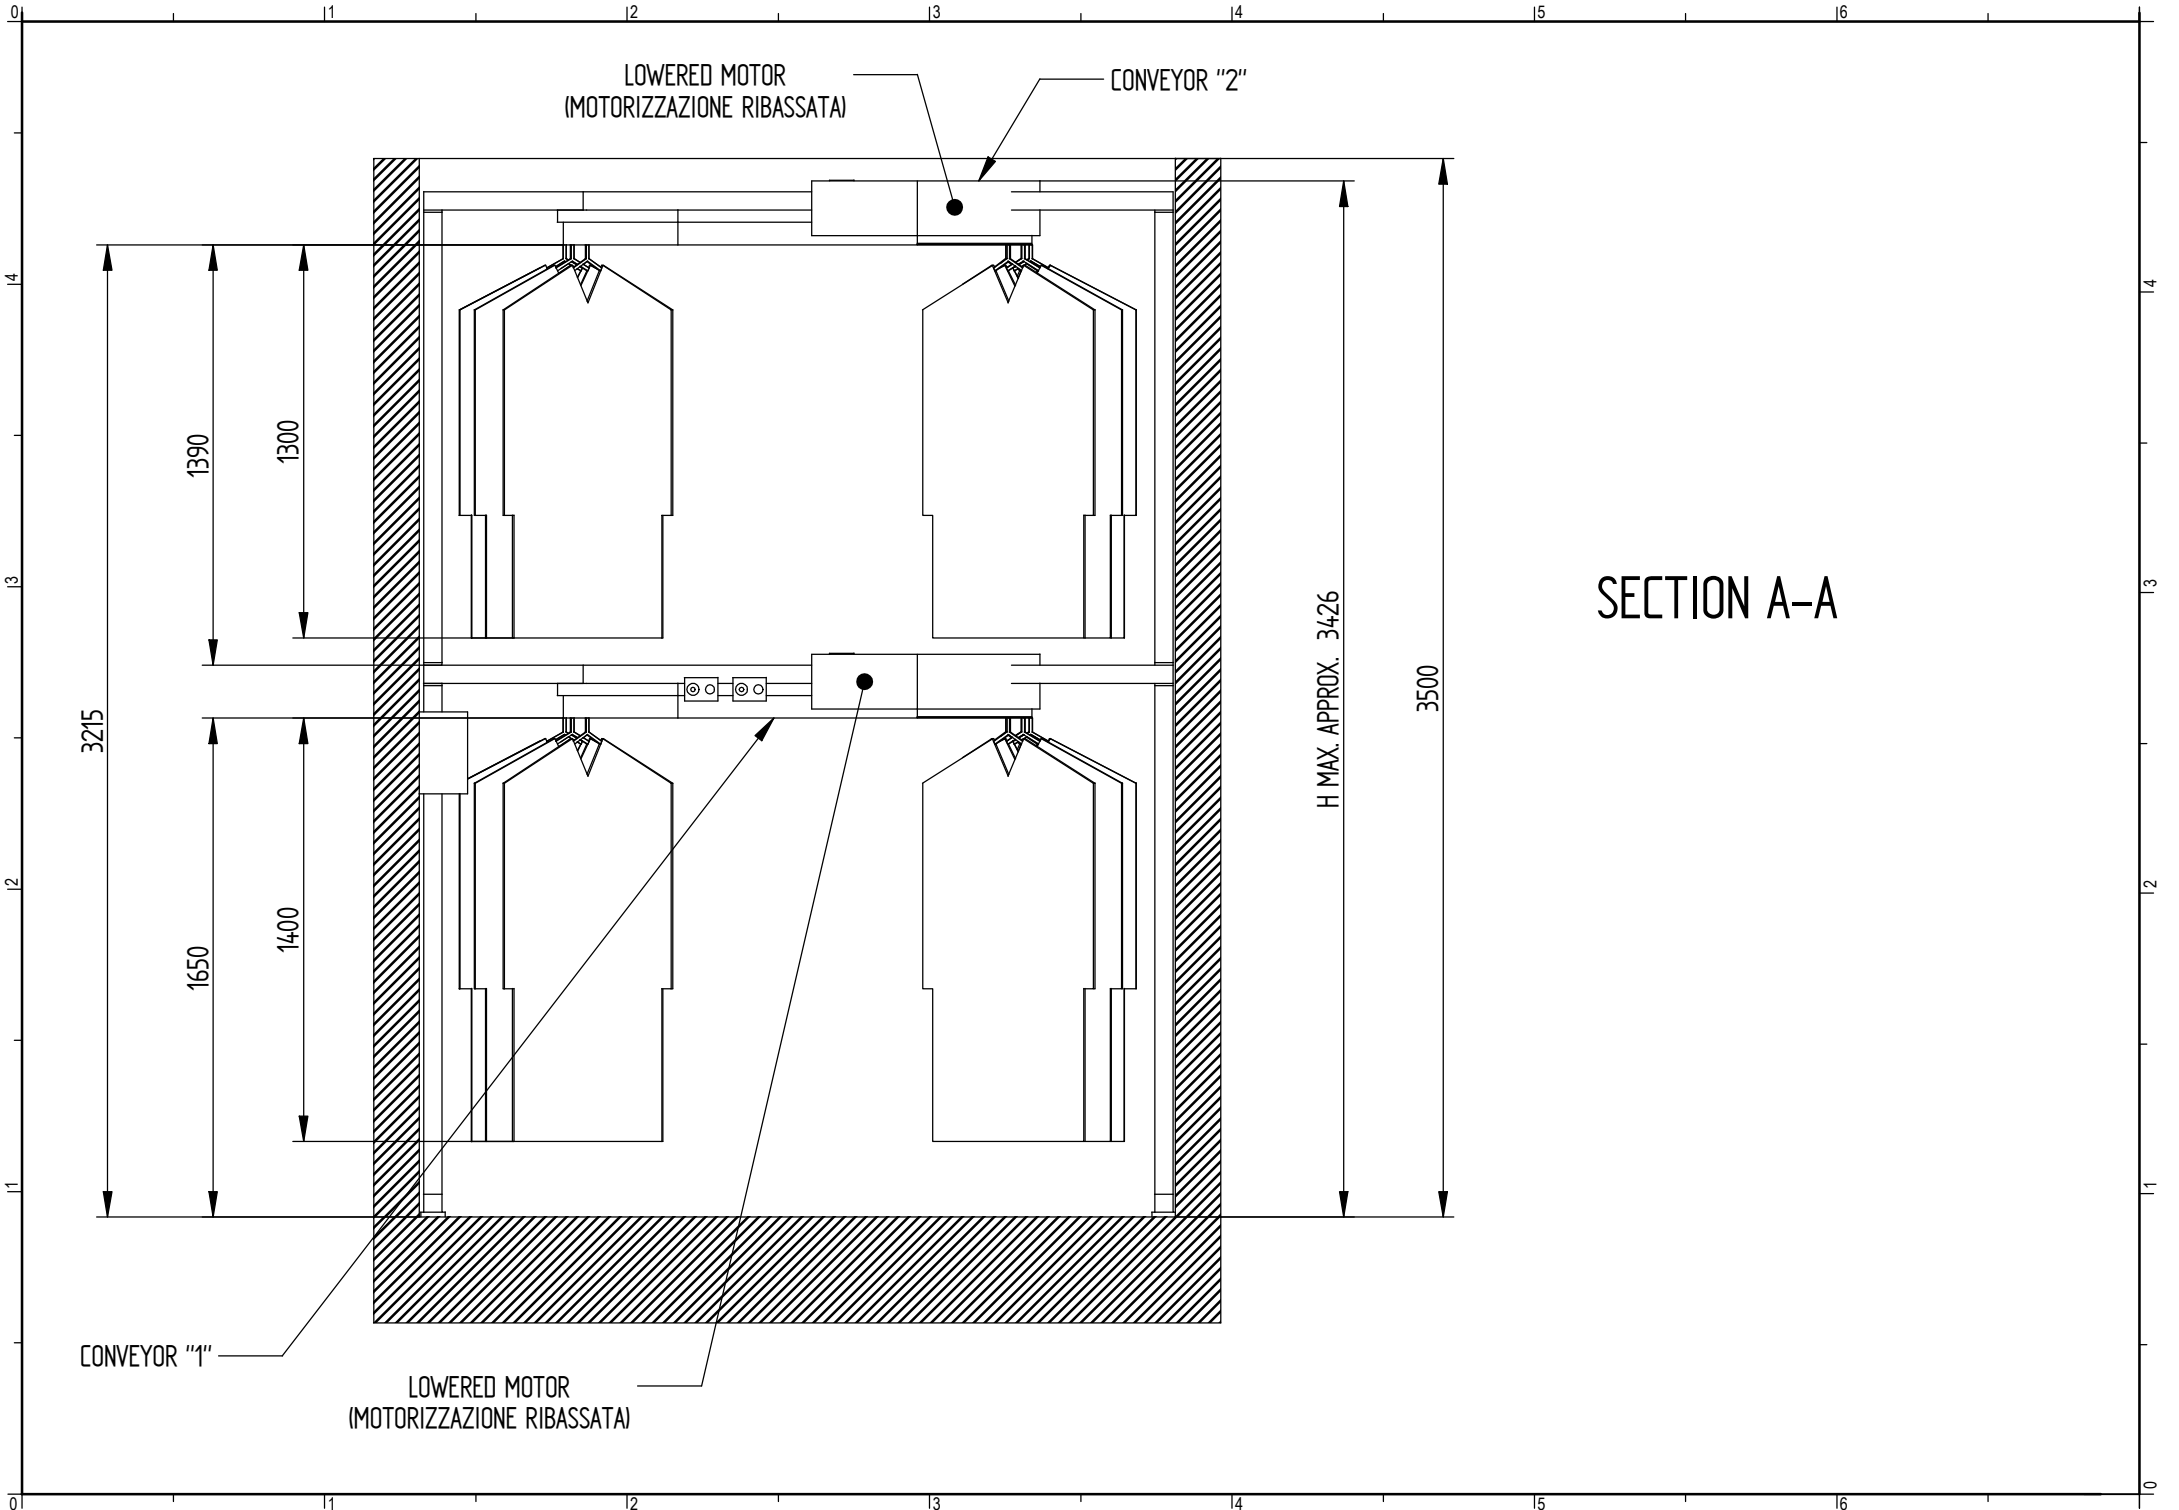

LOWERED MOTOR
(MOTORIZZAZIONE RIBASSATA)

CONVEYOR "2"

1390

1300

3215

1650

1400

H MAX. APPROX. 3426

3500

CONVEYOR "1"

LOWERED MOTOR
(MOTORIZZAZIONE RIBASSATA)

SECTION A-A

1

2

3

4

A

A

B

B

C

C

D

D

CONVEYOR "2"

CONVEYOR "1"

